

BY-3500T

Up to 3500 kg




The ideal solutions for sliding gates at industrial sites.

- Sturdy mechanics to ensure exceptional performance.
- Self-diagnosing safety devices.
- Prepared for the courtesy light management.
- Power supply 230 - 400 V AC Triphase to offer maximum performance.



Dimensions (mm)

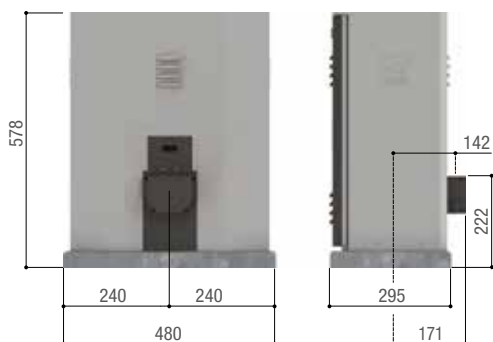

Operational limits

MODELS	001BY-3500T
Max. length of leaf (m)	17
Max. weight of leaf (kg)	3500
Pinion module	6

Technical characteristics

MODELS	BY-3500T
Protection rating (IP)	54
Power supply (V - 50/60 Hz)	230/ 400 V AC THREE PHASE
Power supply to motor (V)	230/ 400 V AC THREE PHASE
Absorption (A)	2
Power (W)	1000
Maneuvering speed (m/min)	10,5
Cycles/Hour	14
Thrust (N)	3500
Operating temperature (°C)	-20 ÷ +55
Motor's heat protection (°C)	140

● 230 – 400 V AC THREE PHASE