

## Clear opening dimensions

- Maximum - Standard version (W) 6000mm x (H) 6000mm

## Frame

- Self-supporting frame without welding
- Anti-corrosion material: galvanized steel with epoxy polyester powder coating
- TRAFICONTROL® flexible guides

## Option

- Stainless steel 304L or 316L

## Curtain

- Fire resistance D
- 100% polyester weft, PVC coated and prestressed
- Anti-UV and anti-mould treatment
- SECURISANGLE® curtain fall protection system

## Options

- Row(s) of oblong(s)
- MAVISION® customization with logo, text
- Triple insulated curtain with thermal insulation UF 2.7
- Fire resistance C and B

## Functioning

- Opening speed: 1m/s and closing speed: 0.5m/s

## “A la carte” security

- Patented SAFETOUCH® system: soft bottom edge
- Patented SAFELINE® system: light curtain

## Motorization

- Motor bi-speed and reducer in conical couple
- Power: 1.1/0.75kW (following dimensions)
- Stainless steel brake IP55 anti-corrosion
- Mounting on silentblocks
- Transmission shaft mounted on self-aligning ball bearing

## Control box

- Integrated ABS control box IP40
- MAVIFLEX electronic board with control LEDs
- Cycle counter

## Options

- IP65 remote ABS control box, for wet areas
- Control by PLC

## Opening controls

- **Manual:** remote control, pull switch, push button...
- **Automatic:** magnetic loop, cells, radar...

## Electrical supply




Other electrical supply on demand.

# Technical dimensions

## Control box

- Control box power cable: 4G2.5 square 3 phases + ground without neutral
- Head circuit breaker: 16A curve C or 10A curve AM
- Dimensions: (h) 400 x (w) 290+55 x (d) 190 mm

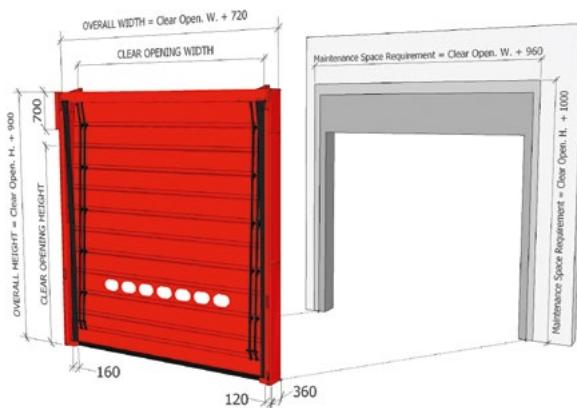

Dimensions and specifications are subject to change without notice.

## Curtain




Oblong windows



## Colours

### Standard RAL for frame and curtain

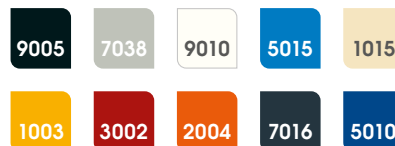

Other colours on demand.

Subject to supplier stocks. RAL colours may vary.