



Operator for sectional or up-and-over garage doors for use in private homes


- 24 V DC systems with encoder to guarantee greater safety and reliability.
- The operator is fastened directly onto the drive guide.
- Silent and reliable sliding guides, available with chain or belt.
- Control board with separate and removable terminal blocks.
- Save up to 250 different users.
- Display for programming and viewing features.
- Integrated release lever, with the possibility of operating from the outside using the door handle.




Dimensions (mm)

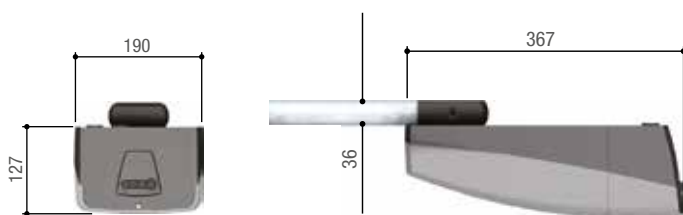


BC – Partially retracting, protruding overhead garage door. (con 001V201)



BM – Fully retracting, protruding overhead garage door.



STA - Sectional Type A door with single guide



STB - Sectional Type B door with double guide.

C-distance = Min. 60 mm.
 H = Max. door height
 * = Maximum overall dimensions, in height, of the door during movement (at about 2/3 of opening)

Operational limits

MODELS	801MV-0050	801MV-0060
Max. surface of the door (m ²)	9	12
Max. traction force (N)	600	800

Technical characteristics

MODELS	801MV-0050	801MV-0060
Protection rating (IP)	20	20
Power supply (V - 50/60 Hz)	230 AC	230 AC
Power supply to motor (V)	24 DC	24 DC
Cycles/Hour	10	10
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55
Manouvering speed (m/min)	6,6	8