

GARD GT8 803BB-0180

CAME 




GGT80AGS

Automatic barrier with irreversible 24 V DC operator with encoder; galvanized steel and painted cabinet with set up for fitting accessories. Balancing springs included.



Dimensions (mm)

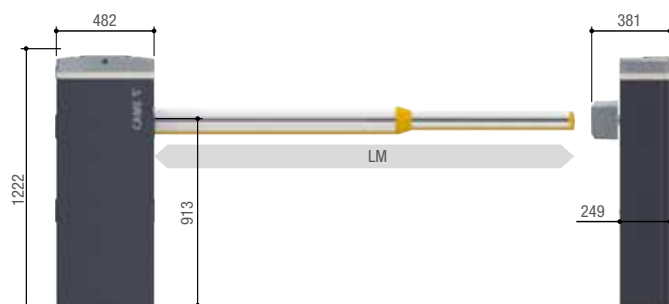

Operational limits

Max. net clearance width (m)	7,8
------------------------------	-----

Technical characteristics

Power supply (V - 50/60 Hz)	230 AC
Power supply to motor (V)	24 DC
Power (W)	300
Maneuvering time at 90° (s)	4 ÷ 8
Cycles/Hour	160
Operating temperature (°C)	-20 ÷ +55 (-40 with item 001PSRT01)
Protection rating (IP)	54
Torque (Nm)	600
Reduction ratio (i)	202
Weight (Kg)	90

CAME reserves the right to modify the products characteristics shown in this document at any time and without notice. For complete information refer to the installation manual.
The installation must be carried out by qualified personnel in compliance with the regulations for the installation of electrical equipment in force in the country where the product is installed.
Date 02/2022

CAME S.P.A.

Via Martiri della Libertà, 15 - 31030 Dosson di Casier - Treviso - ITALY

CAME.COM